

# CH-01

## Wireless chime



433 MHz



## User manual

# SLINEX

### 1. Package

CH-01 wireless chime – 1 pc.  
Mounting kit – 1 pc.  
User manual – 1 pc.

### 2. Specification

MELODIES QUANTITY  
38 melodies

VOLUME  
3 levels (high, middle and low)

POWER  
2 x AA batteries

WORKING FREQUENCY  
433 MHz


MOUNTING TYPE  
Surface mount

DIMENSIONS  
56×116×33 mm (2.20×4.57×1.30")

WORKING TEMPERATURE  
-10 ... +55 °C (+14...+131 °F)

### 3. Description

- 1 Pairing button
- 2 Volume control button
- 3 Melody control button
- 4 Speaker
- 5 Battery compartment (on the back side)

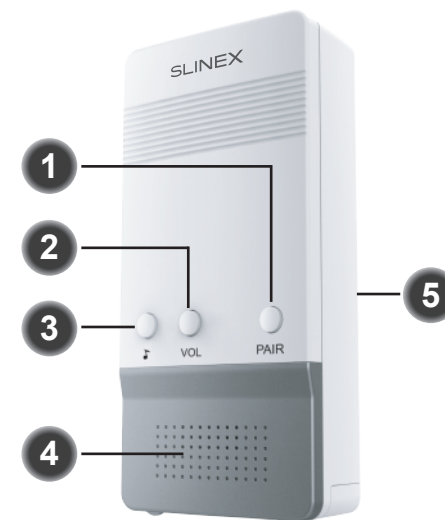

### 4. Setup

Press the call button on ML-20IP outdoor panel, then press «PAIR» button on the wireless chime to pair devices. You will hear a ringtone from wireless chime if pairing is successful. After pairing you will hear chime sound every time visitor presses the call button on ML-20IP outdoor panel.

Press «VOL» button to change volume between high, middle and low modes.

Press «♪» button to change current ringtone.